

# HKV Pump

## HKV Pump


- High Hydraulic performance
- Simple, robust and compact
- One-piece composite body
- Noryl impeller
- Suitable for sea water
- Transparent lid
- IP55 class F motor - suitable for continuous use
- 316 stainless steel shaft
- Max water temp 40°C




## HKV Pump - 50Hz

Code	HP	KW	Phase	Voltage	Head m <sup>2</sup> /hr					
					2	4	6	8	10	12
HKV025	0.25HP	0.18	1	220	7	6	4.8	3		
HKV031	0.33HP	0.24	1	220	-	9.3	7.6	5.8	3.2	
HKV033	0.33HP	0.24	3	380	-	9.3	7.6	5.8	3.2	
HKV051	0.5HP	0.37	1	220	-	-	10.4	8.3	5.8	
HKV053	0.5HP	0.37	3	380	-	-	10.4	8.3	5.8	
HKV071	0.75HP	0.55	1	220	-	-	-	10.5	7.5	3
HKV073	0.75HP	0.55	3	380	-	-	-	10.5	7.5	3

HKV Pump

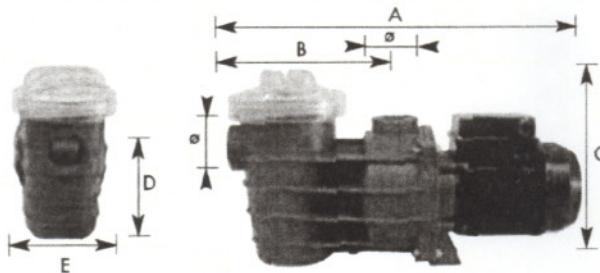

Dimensions in mm					net weight kg	gross weight kg
A	B	C	D	E		
1" 1/2	460	205	240	145	6.2	7

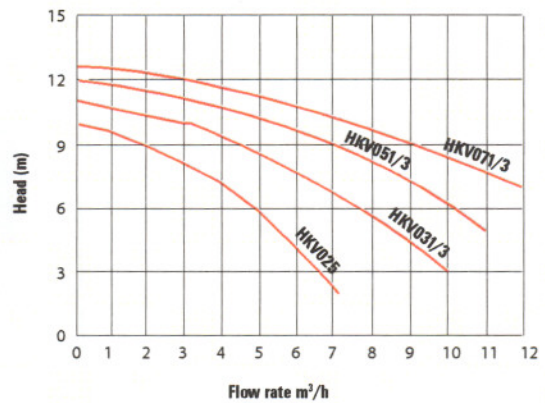

**Certikin**